

SHADOW II RFID (S6 Series) Electronic Hotel Lock

Be-Tech SHADOW II RFID series is especially designed for the hotels with the desire of making sure the lock blends perfectly with the necessary hardware and the door.

Be-Tech SHADOW II RFID series is especially suited for the contemporary and modern hotel environment. It enhances the overall image of the corridor with the aesthetic lock's design which perfectly blends into hotel decoration style.

Less on door, Always is more. With **Be-Tech SHADOW II RFID** series, it allows architects and designers maximum design freedom and minimum appearance on door in terms of preserving the door aesthetics.

Features:


- Stand alone electronic lock with RFID technology.
- High security stainless steel mortise lockcase available in DIN version.
- Stainless steel handle with long lasting painting finish.
- 3-point stainless steel latch construction with antifriction mechanism.
- Mortise equipped 20mm throw high strength deadbolt.
- Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy regress in emergency situation.
- ADA compliant (guest with physical disabilities).
- Future proof re-programmable FLASH RAM lock memory.
- Powered by four AA batteries that provide up to 1 year normal life time.
- 1000 events audit trail.
- Compatible with BIS HOTEL software platform.
- High security mechanical override cylinder available.



RFID Specifications:

- 13.56MHz technology
- Compatible with the following standard : ISO 14443 A (MIFARE Classic)
- Eleven free sectors for future All-in-one card application use

Dimensions:

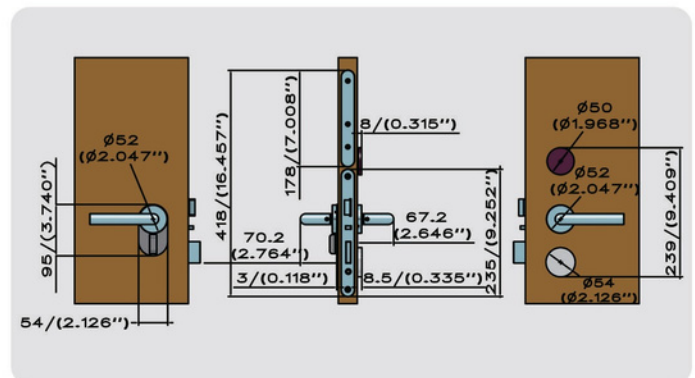

SHADOW II RFID series is not suitable for outdoor.

VOCA
Building Materials Co., Ltd.

Your Hospitality Partner
Leading Keyless Solutions Since 1992



Technical Data:

Power	4 x 1.5V AA alkaline batteries
Battery Location	Inside of the door
Material	Handles: Stainless steel quality SUS304 Sensor: PC
Metal Finishes	Silver, Matte Black
Emergency Opening Options	Emergency Opening with Mechanical cylinder
Locking Mechanism	Electro-mechanical locking mechanism
Door Thickness	35-60mm
System Software Compatibility	BIS Hotel
Storage Temperature	Workable -20°C~60°C: non-condensing environment
Tested Operating Temperature	Tested from -25°C~70°C
Mortise	Compatible with DIN-65 mortise
Supported RFID Standard	ISO 14443 A (MIFARE Classic)

Lockcase Dimensions:

DIN Lock Case Variants	DIN DB
DIN Lock Caes Widths	24mm/0.95inches
DIN Backset	65mm/2.56inches

DIN Lockcase

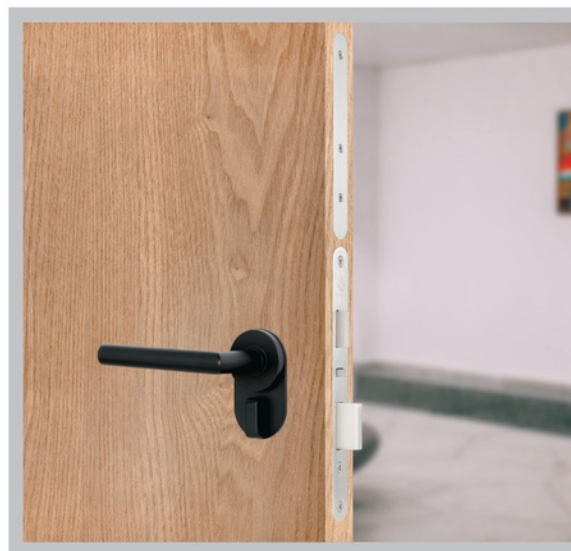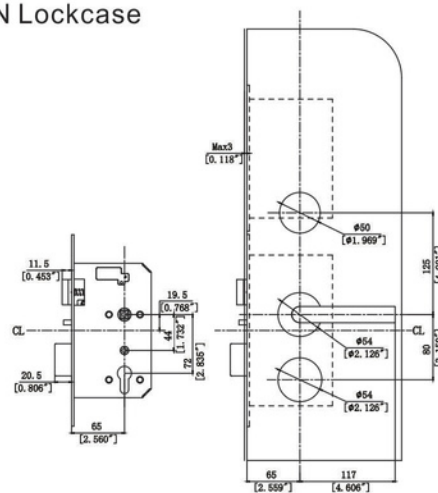

VOCA Building Materials Co., Ltd.

61/156 Thaveemitra Soi 5, Rama IX Rd., Huaykwang, Huaykwang, Bangkok 10310

Tel : (662) 612-2029 (Auto), Mobile : (66) 87-591-2233

Line ID : officevoca E-Mail : info@vocathailand.com

www.vocathailand.com

Specifications may change without notice.

ID: 04-BTMA42C2105-E1-03