

F6 SERIES HOTEL LOCK



Product Overview



Front Body




Back Body

Specifications

Locking Mechanism	Electro-mechanical locking mechanism on front body
Mortise Compatibility	Tubular Latch 5050 Mortise
Door Thickness	40-50mm
Life cycles	Up to 200,000 cycles
Finishes	Satin Nickel/Black
RFID Specifications	13.56MHz technology Compatible with ISO 14443 A standard
Available Shape of Key Cards	Contactless RFID Key Cards Contactless RFID Key Fobs Contactless RFID Silicone Bracelet

Product Dimensions

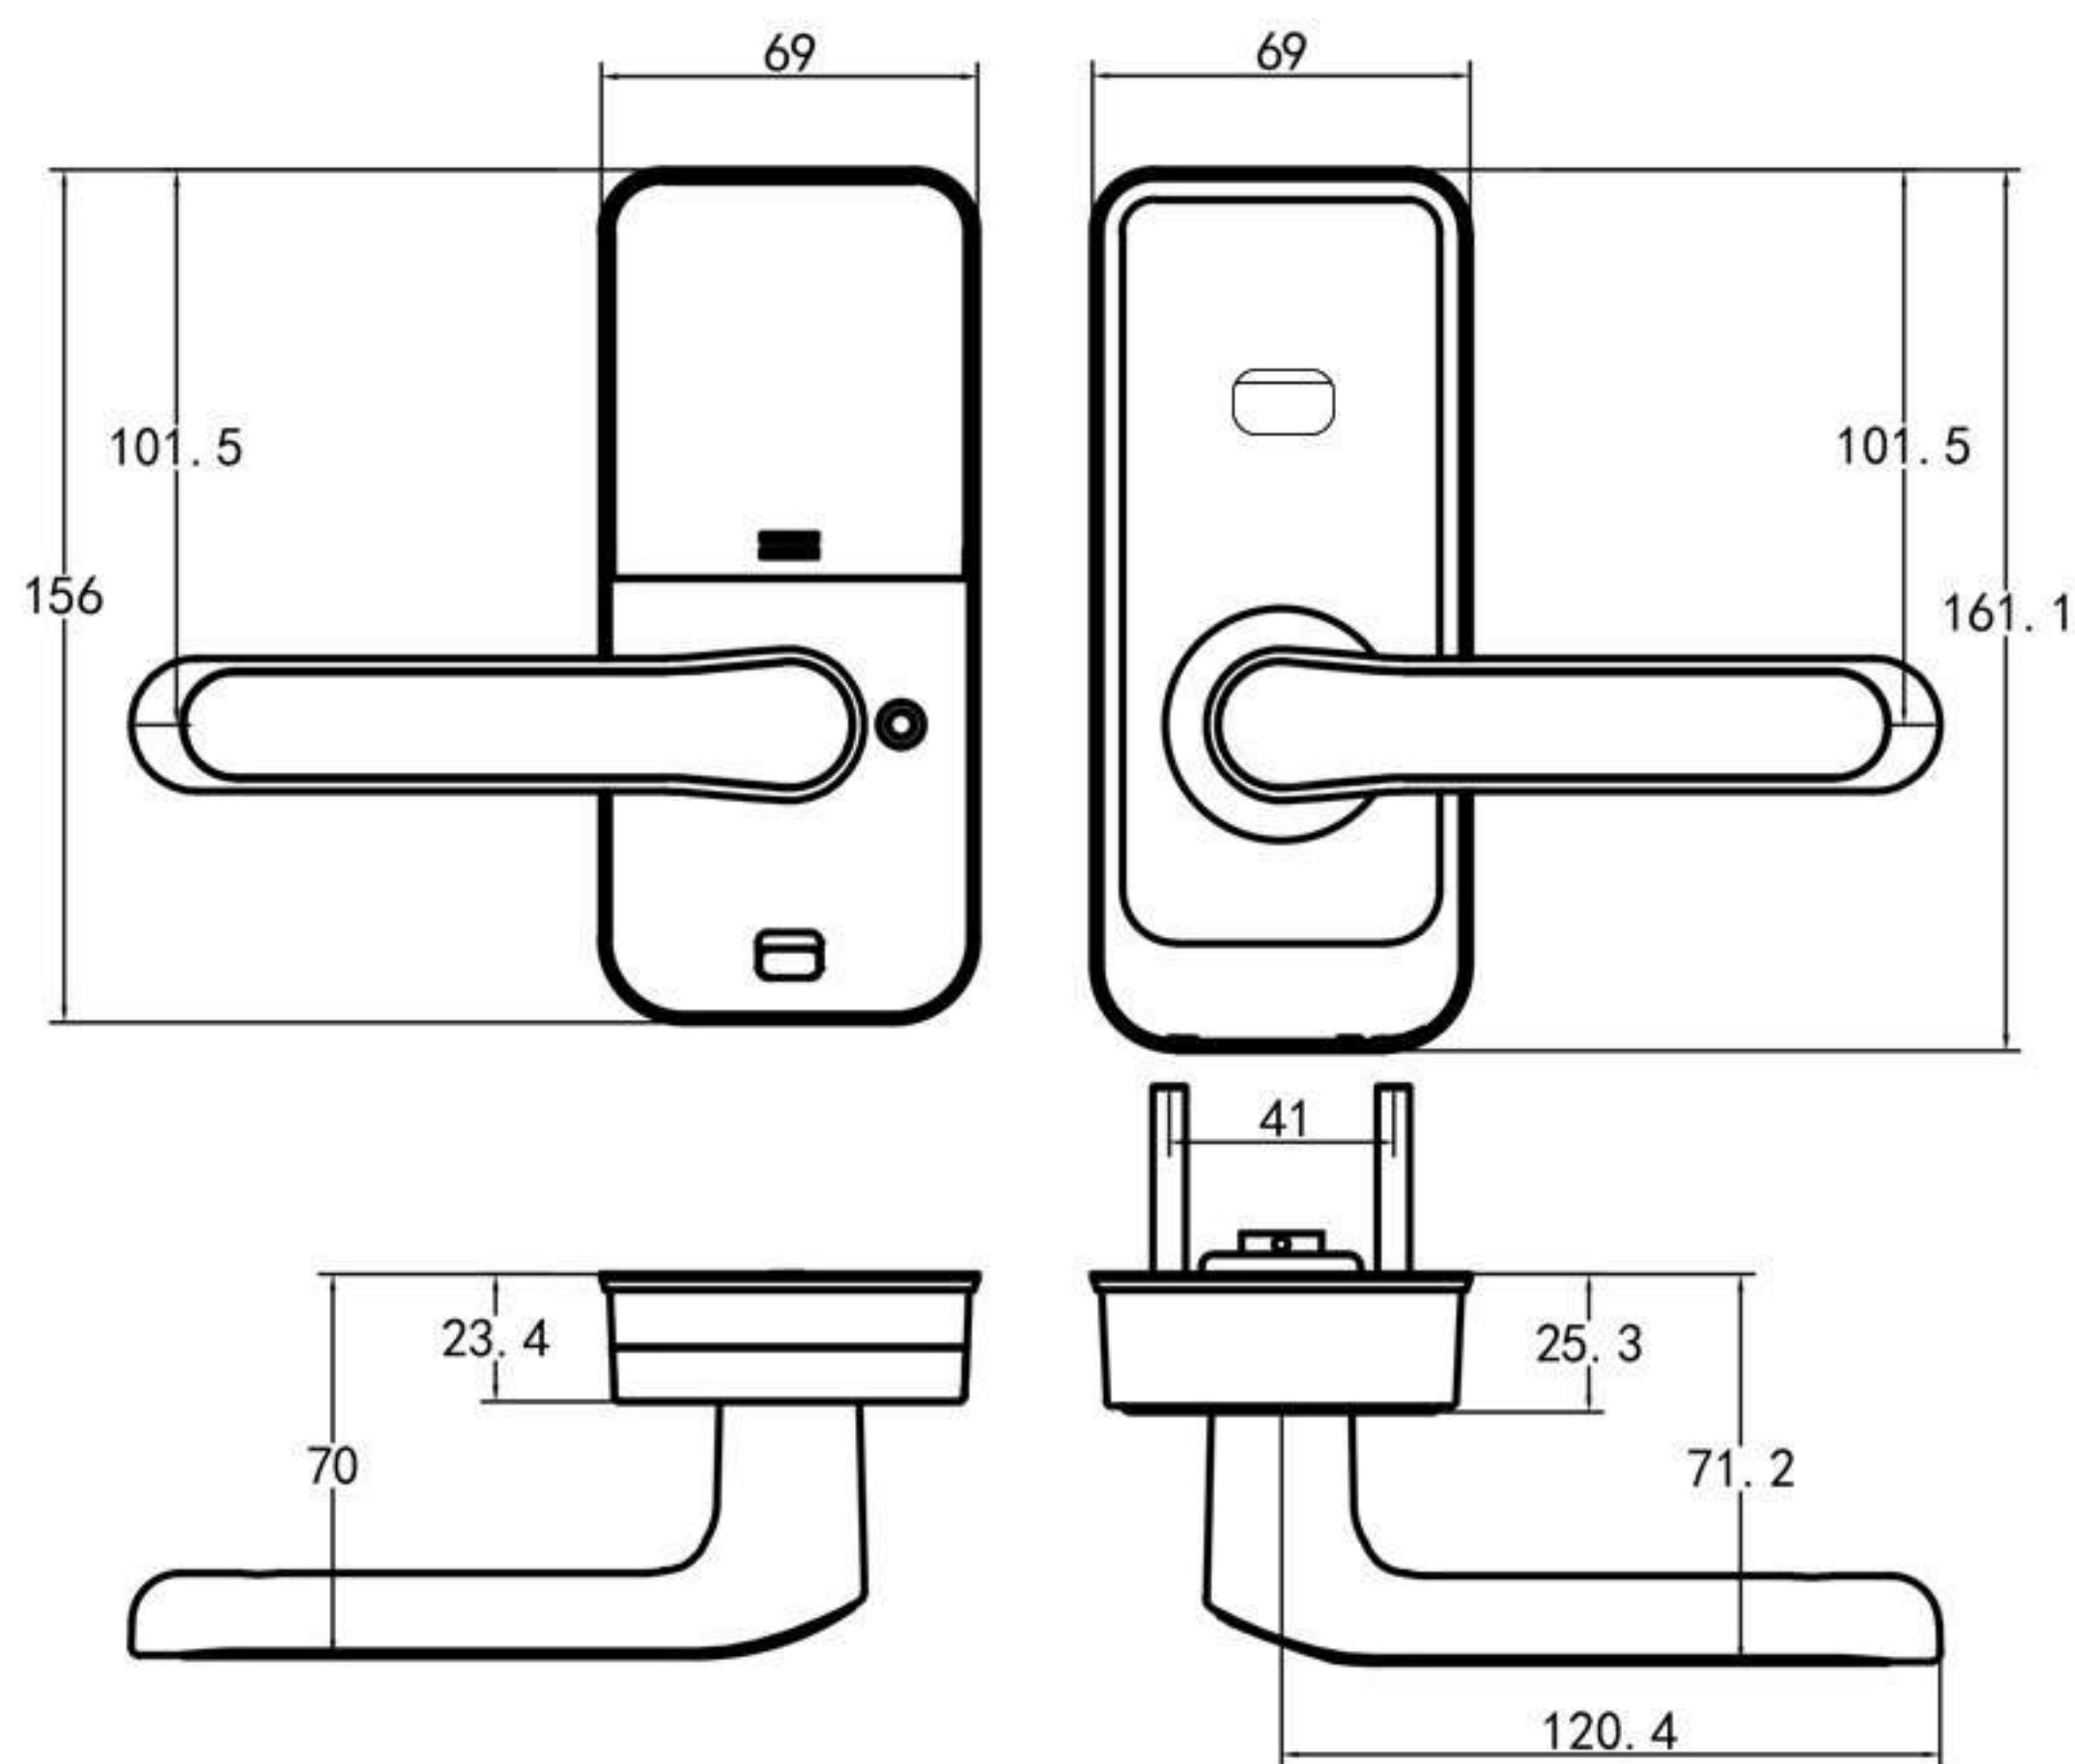

Main Features

- Simple offline installation.
- Fashionable aluminium alloy handle and panel design.
- Fully integrated with the Flock hotel locking platform.
- All communications between the carrier and the electronic lock are encrypted and secure.
- Optical signaling through LED. Dual colour blue/red to indicate access authorization.
- Available in 2 different finishes: Satin nickel and black.
- Battery operated 4 x LR6 Size AA will last for approximately 1 year with 10 times operations daily.
- Emergency opening by mechanical override.
- For tubular latch door retrofits.