


RFID Encoder and Updater

This highly qualified and sophisticated RFID encoder and updater is embedded into one single device. It is designed with functionality, reliability and durability in mind.



Dimensions:

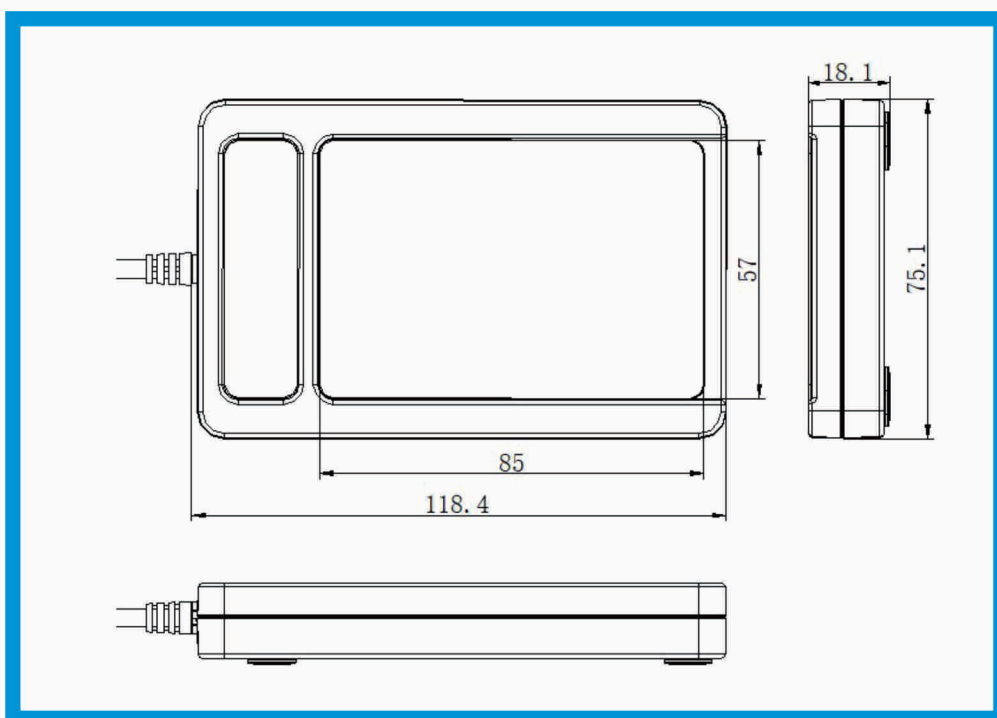

Technical Data:

Physical Characteristics

Dimensions	120.5 mm (L) × 72.0 mm (W) × 20.4 mm (H)
Weight	140 g
Color	Black

USB Host Interface

Protocol	USB HID Keyboard Class
Connector Type	Standard Type A
Power Source	From USB port
Speed	USB Full Speed (12 Mbps)
Supply Voltage	5 V
Supply Current	Max. 200 mA
Cable Length	2.0 m, Fixed

Contactless Smart Card Interface

Standard	ISO 14443 A and B Parts 1-4
Protocol	ISO 14443 T=CL for ISO 14443-4-compliant cards T=CL Emulation for MIFARE Classic
Operating Frequency	13.56 MHz
Operating Distance	Up to 50 mm (depending on card type)
Smart Card Read/Write Speed	106 Kbps, 212 Kbps, 424 Kbps, 848 Kbps
Antenna Size	65 mm × 60 mm

Built-in Peripherals

LED	2 single-color: Red and Green
Buzzer	Monotone

Operating Conditions

Temperature	0 °C – 60 °C
Humidity	Max. 90% (non-condensing)
MTBF	500,000 hrs

VOCA Building Material Co., Ltd.
61/156 Thaveemintra Soi 5, Rama IX Rd.,
Huaykwang, Huaykwang, Bangkok 10310
Tel : (662) 612-2029 (Auto)
Mobile & Line : 087-591-2233
E-mail : voca@truemail.co.th
www.vocathailand.com

ID: 04-BTMA42C1910-E1-01

Specifications may change without notice.