

F6

Hotel Lock Serie



Product Overview



Front Body




Back Body

Specifications

| | |
|------------------------------|---|
| Locking Mechanism | Electro-mechanical locking mechanism on front body |
| Mortise Compatibility | Tubular Latch 5050 Mortise |
| Door Thickness | 40-50mm |
| Life cycles | Up to 200,000 cycles |
| Finishes | Satin Nickel/Black |
| RFID Specifications | 13.56MHz technology Compatible with ISO 14443 A standard |
| Available Shape of Key Cards | Contactless RFID Key Cards Contactless RFID Key Fobs Contactless RFID Silicone Bracelet |

Product Dimensions

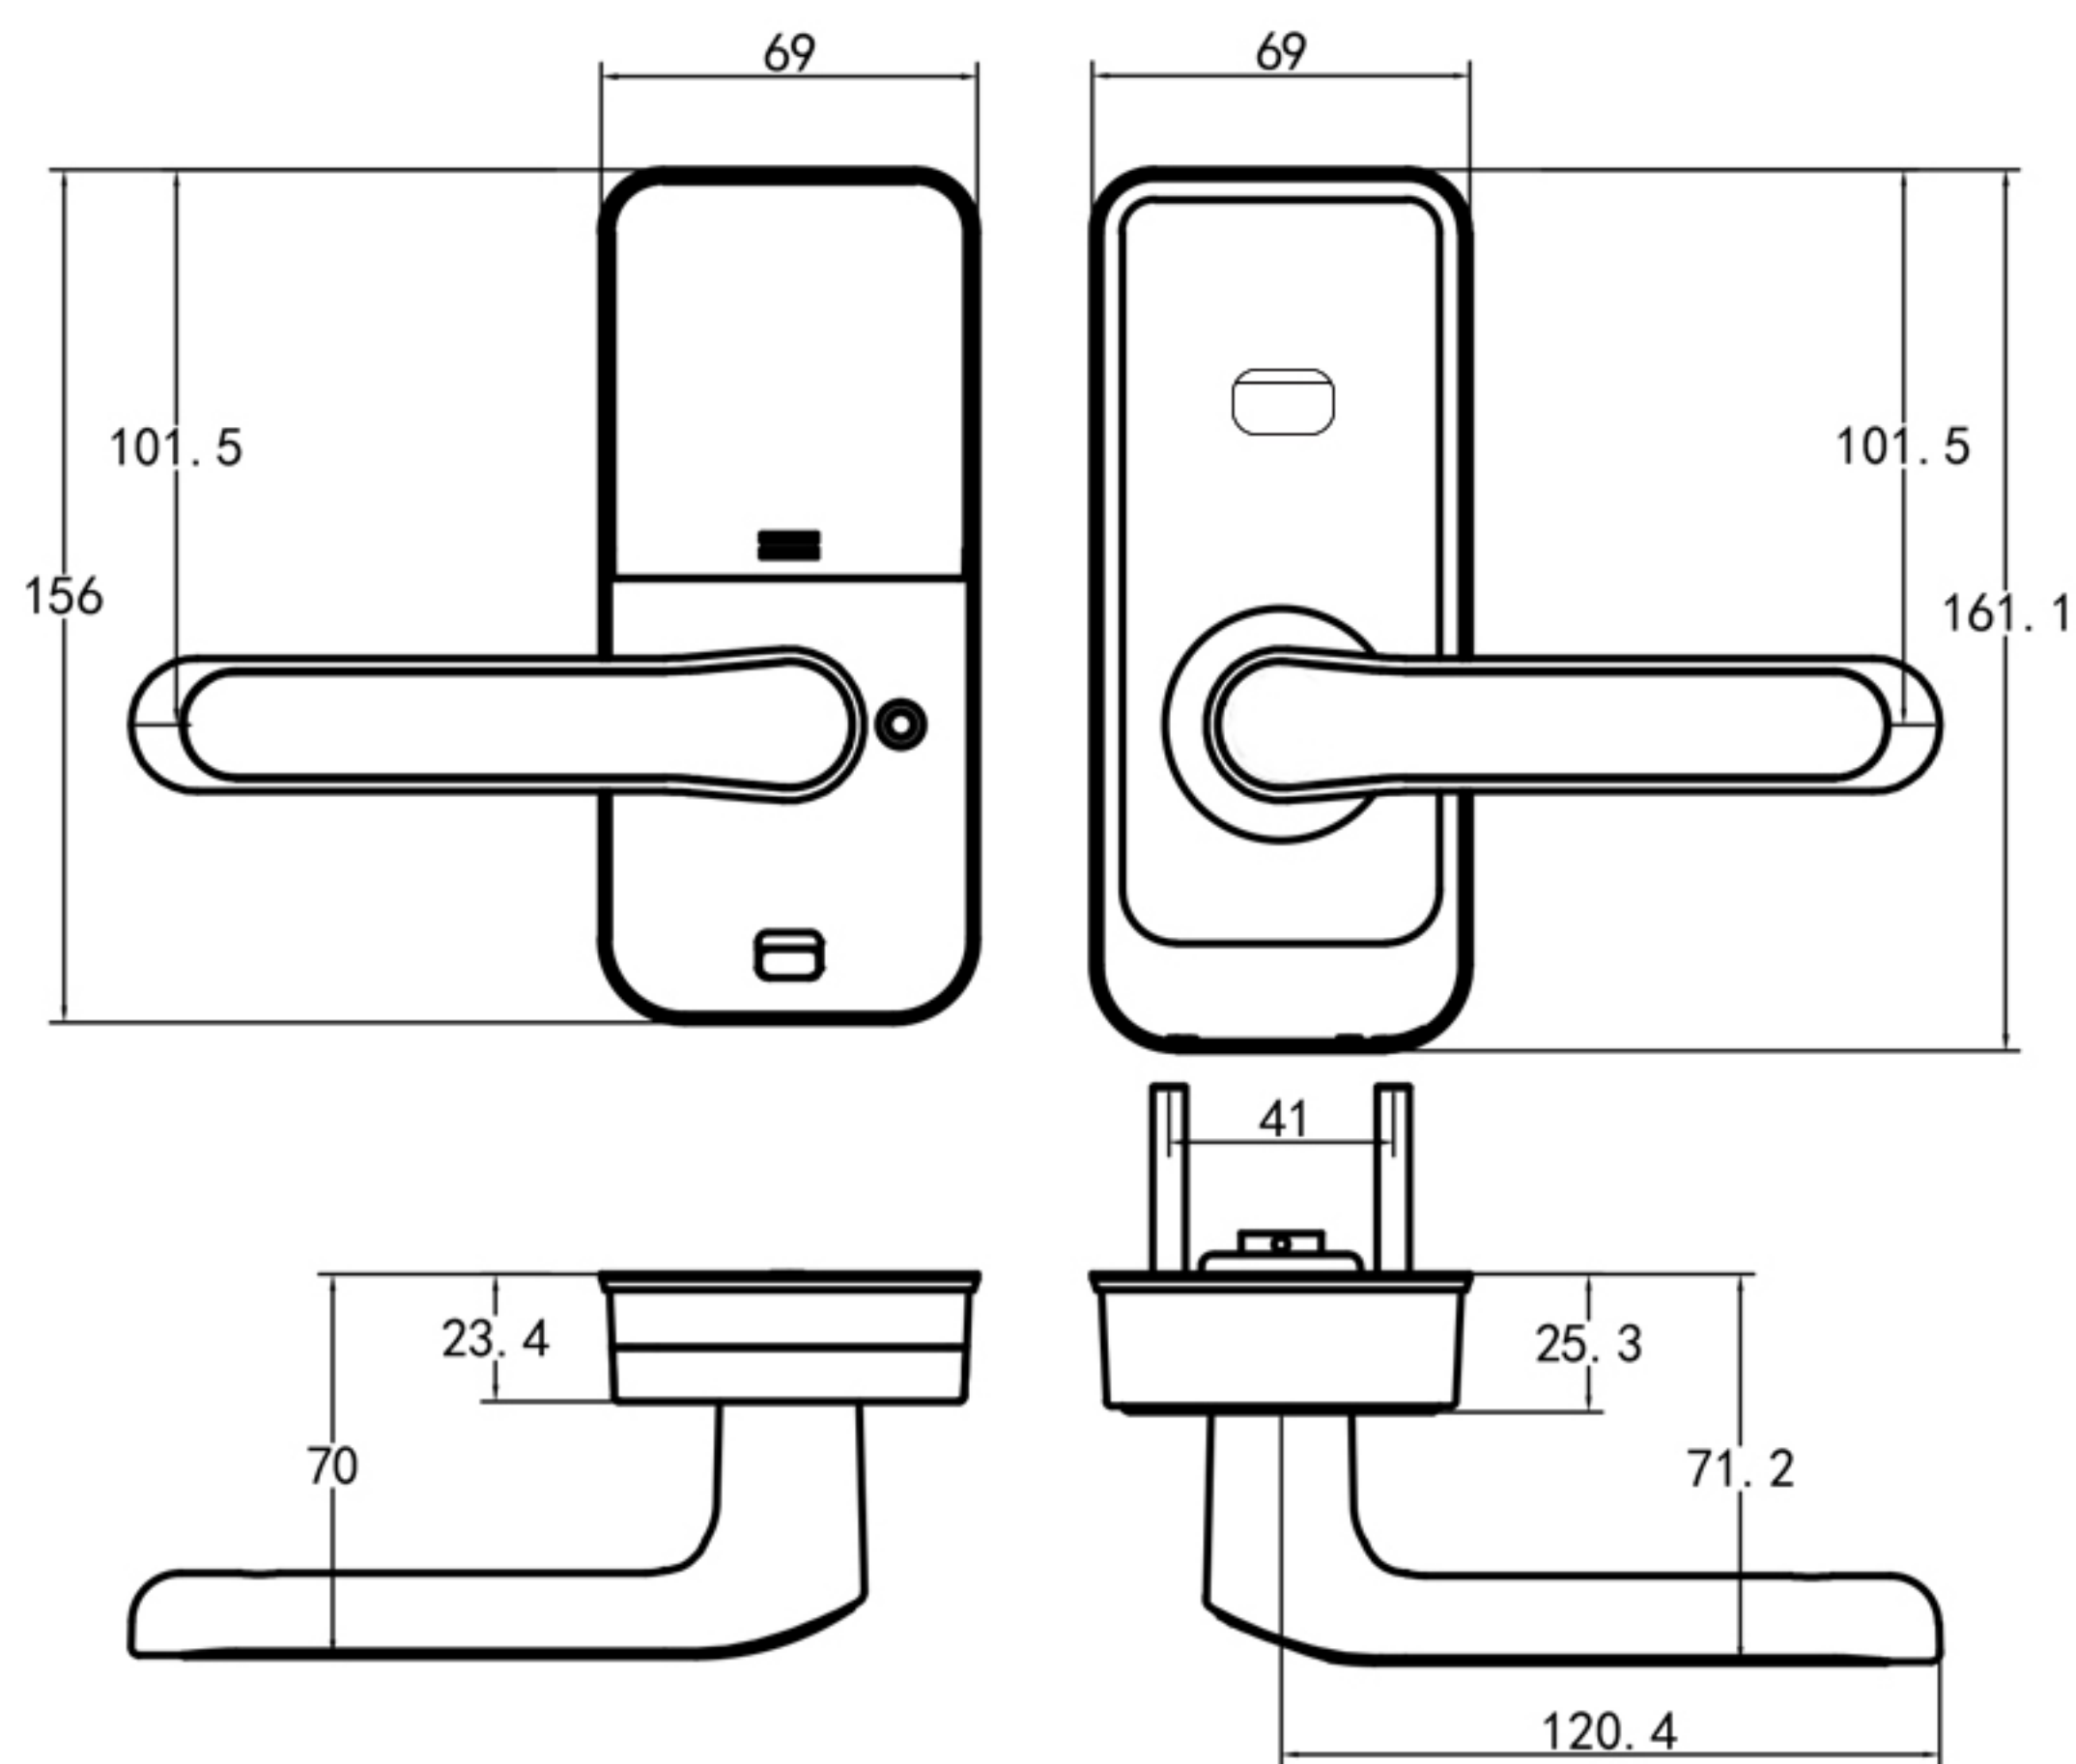

Main Features

- Simple offline installation.
- Fashionable aluminium alloy handle and panel design.
- Fully integrated with the Flock hotel locking platform.
- All communications between the carrier and the electronic lock are encrypted and secure.
- Optical signaling through LED. Dual colour blue/red to indicate access authorization.
- Available in 2 different finishes: Satin nickel and black.
- Battery operated 4 x LR6 Size AA will last for approximately 1 year with 10 times operations daily.
- Emergency opening by mechanical override.
- For tubular latch door retrofits.